

مودم 4G قابل حمل شرکت دی لینک دستگاهی است که به کاربر اجازه‌ی دسترسی به شبکه گسترده جهانی اینترنت همراه را می‌دهد. سایز کوچک و قابلیت حمل آن به کاربر این امکان را می‌دهد که در هر نقطه‌ای که پوشش اینترنت همراه داشته باشد از این مودم استفاده کرده و اینترنت آن را با دوستان خود به اشتراک بگذارد. براحتی می‌توانید سیمکارتی که اینترنت آن فعال شده است را داخل دستگاه قرار داده و از یک ارتباط امن بیسیم لذت ببرید. این دستگاه قابلیت این را دارد که هم بعنوان یک مودم 4G و هم بعنوان یک روتر بیسیم استفاده شود. چنانچه مایل هستید بیشتر راجع به این محصول پرفروش دی لینک و قابلیت‌های آن بدانید به صفحه [DWR-932C E1](#) مراجعه نمایید.


## نحوه راه اندازی مودم همراه 932C

برای دسترسی به صفحه تنظیمات مودم نیاز هست آدرس آی پی دستگاه که بصورت پیش فرض 192.168.0.1 تعریف شده است را در آدرس بار مرورگر خود را وارد کنید و اینتر بزنید. (در صورتیکه موفق به ورود نشدید می‌توانید دستگاه را ریست سخت افزاری کرده تا به تنظیمات کارخانه برگردد و مجدد با همین آدرس آی پی اقدام به ورود به صفحه تنظیمات برای راه اندازی دستگاه کنید)

The screenshot shows a web browser interface. At the top, the address bar contains the IP address '192.168.0.1' with a red arrow pointing to it from a yellow box containing the Persian text 'آدرس آی پی را وارد کنید'. Below the address bar is a search bar with the text 'Search the Web'. Underneath, there is a section titled 'TOP SITES' with several icons representing different websites: a question mark, a D-Link logo, a D-Link logo with '1', the Google logo, and a logo for 'digistyle'. Below this is a section titled 'HIGHLIGHTS' with three cards. The first card is for 'AccuWeather' with a sun icon and the text 'Weather in Mashhad - AccuWeather Forecast for Razavi Khorasan Iran'. The second card is for 'LANIRAN' with an image of a router and the text 'خرید روتر بی سیم تی پی لینک - مدل TL-WR940N - ایران شبکه بررسی مشخصات و خرید روتر بی سیم تی پی لینک به همراه هدیه، ضمانت اصالت'. The third card is for 'DLINK' with an image of a network recorder and the text 'DNR-2020-04P JustConnect 16-Channel PoE Network Video Recorder | D-Link UK'. A mouse cursor is visible on the right side of the page.



مقدار نام کاربری را admin و مقدار رمز عبور را خالی بگذارید و Sign in را بزنید.

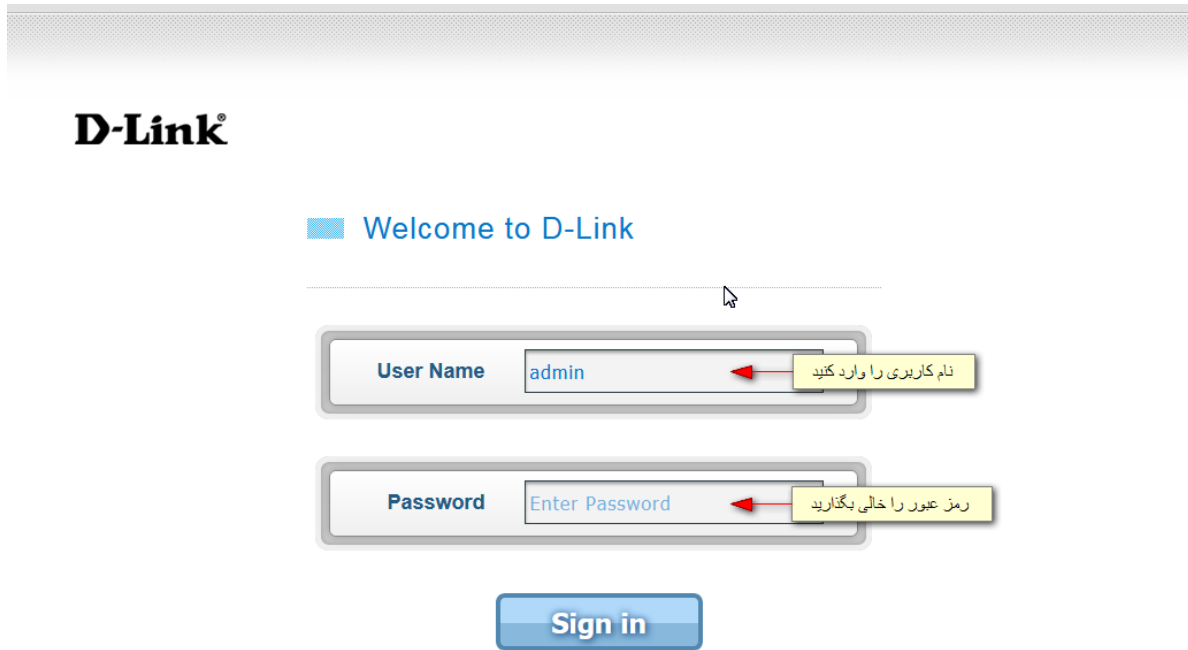

The image shows the D-Link login interface. At the top left is the D-Link logo. Below it, the text "Welcome to D-Link" is displayed. There are two input fields: "User Name" with the value "admin" and "Password" with the placeholder "Enter Password". A blue "Sign in" button is positioned below the password field. Two yellow callout boxes with red arrows point to the input fields, containing Persian text: "نام کاربری را وارد کنید" (Enter the username) and "رمز عبور را خالی بگذارید" (Leave the password field empty).

در صفحه ای که باز می شود میتوانید اطلاعات کلی دستگاه را ببینید.




The image shows the D-Link DWR-932C dashboard. At the top left is the D-Link logo and the model number "DWR-932C". On the top right, there is a language dropdown set to "English", a "Login as admin" indicator, and a "Logout" button. Below the header are navigation tabs for "Internet", "Wi-Fi", "Settings", "System", and "SMS". The main content area is divided into three columns. The left column shows "Internet" status (Irancell, 155.21 KB Used, -101dBm) and "Connection Mode" (Always Connected). The middle column features a circular image of the device, its SSID "diink\_DWR-932C\_8988", and the web address "Web: 192.168.0.1", with a "Setup Wizard" button below. The right column shows "Wi-Fi" status (2.4 GHz), "Short Messages" (Inbox: 1, Drafts: 0, New SMS: 1), and "Power Saving" settings (Suspend: OFF, Deep Sleep: OFF).



1- برای شروع نصب مودم دی لینک dwr-932c روی Setup Wizard کلیک کنید.



2- براساس اپراتور سرویس دهنده APN را انتخاب کنید. (معمولا بصورت اتومات تشخیص داده می شود و نیاز به تغییر وجود ندارد)

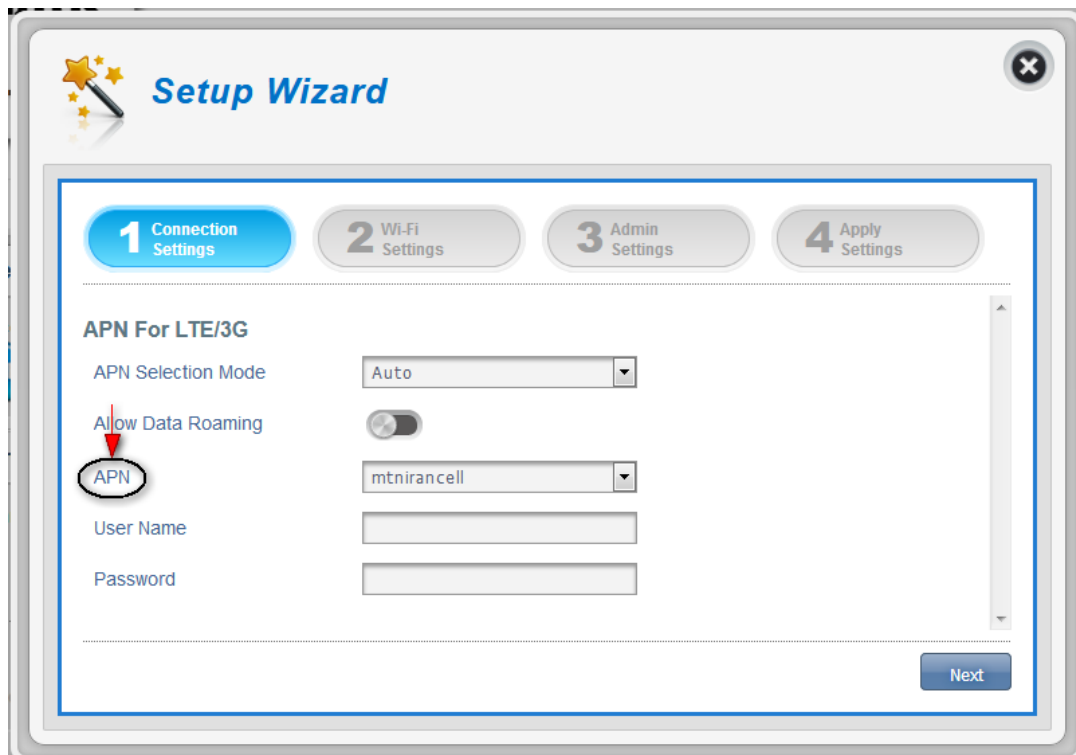

3- در گام بعدی میتوانید برای وایرلس خود نام و رمز عبور و همچنین نوع رمزگذاری وایرلس را انتخاب کنید. در نهایت Next را بزنید.

The screenshot shows the 'Setup Wizard' window, step 2: 'Wi-Fi Settings'. The progress bar at the top indicates the current step. The main content area is titled 'Wi-Fi 2.4 GHz SSID' and contains the following fields:

- SSID For Wi-Fi 2.4 GHz: dlink\_DWR-932C\_8988 (with a yellow callout box: 'تعریف نام وایرلس')
- Protection: Advanced Protection
- WPA Mode: Auto (WPA2 or WPA) (with a yellow callout box: 'انتخاب نوع رمزگذاری وایرلس')
- Cipher Type: AES / TKIP
- Pre-Shared Key: [Redacted] (with a yellow callout box: 'تعریف رمز عبور وایرلس') and a 'New Key' button)

At the bottom right, there are 'Previous' and 'Next' buttons. The 'Next' button is highlighted with a red circle.

4- در این مرحله می توانید در صورت تمایل رمز عبور ورود به صفحه تنظیمات مودم dwr-932c را تغییر دهید.

The screenshot shows the 'Setup Wizard' window, step 3: 'Admin Settings'. The progress bar at the top indicates the current step. The main content area is titled 'Admin Settings' and contains the following fields:


- Old Password: [Empty text box]
- New Password: [Empty text box]
- Confirm Password: [Empty text box] (with a 'Show Characters' checkbox)
- Language: English

Below the 'Admin Settings' section, there is a 'Date & Time' section with a partially visible 'GMT' field.

At the bottom right, there are 'Previous' and 'Next' buttons. The 'Next' button is highlighted with a red circle.




5- در مرحله آخر برای ذخیره شدن اطلاعات Apply را بزنید.

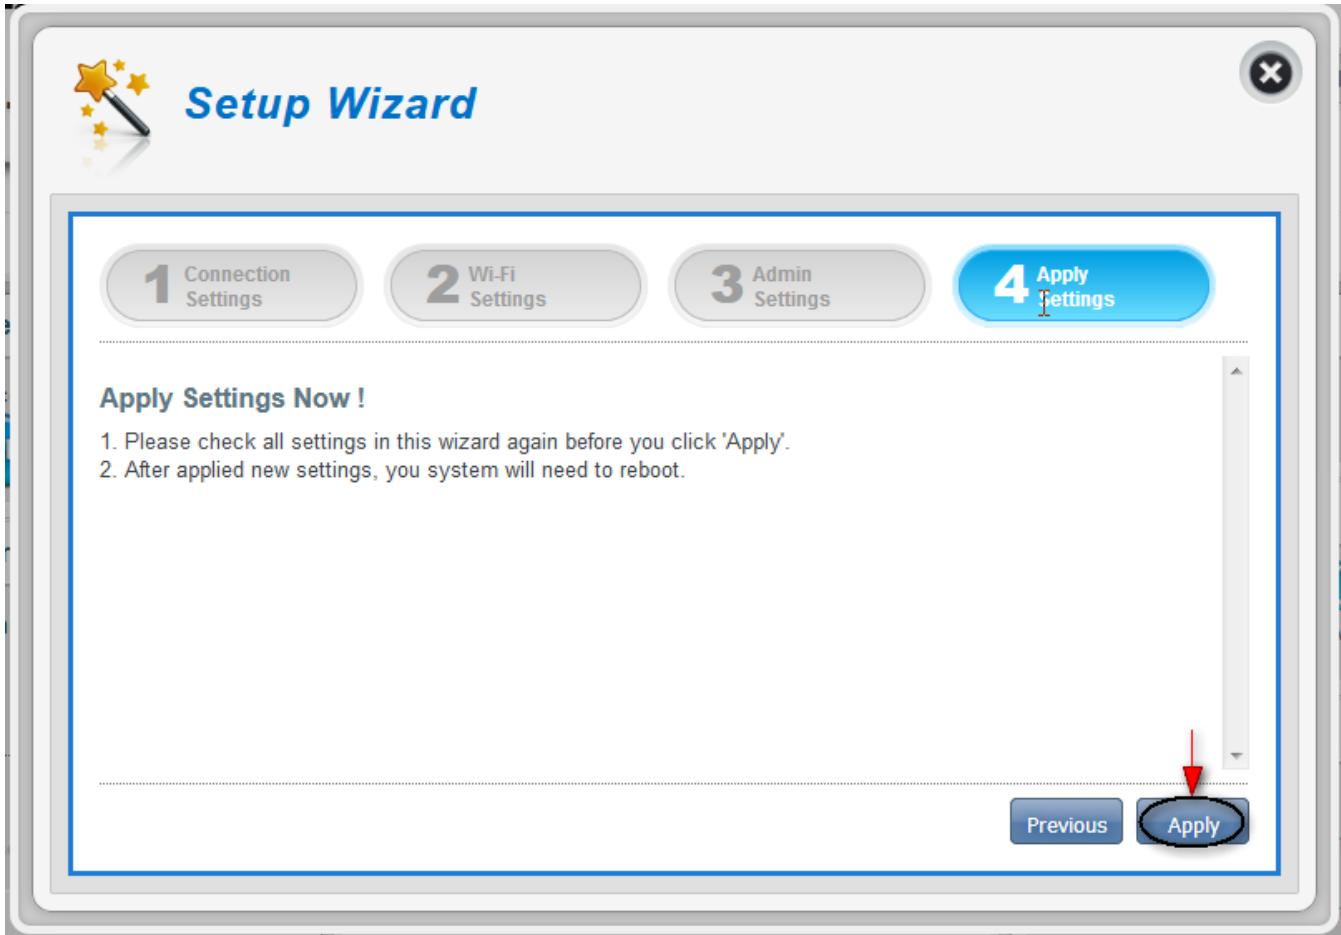


بدین ترتیب نصب مودم 4G دی لینک 932c به پایان میرسد.



- می توانید کانکشن خود را دستی انتخاب کنید. برای اینکار به Connection Mode Settings از سربرگ Internet بروید.

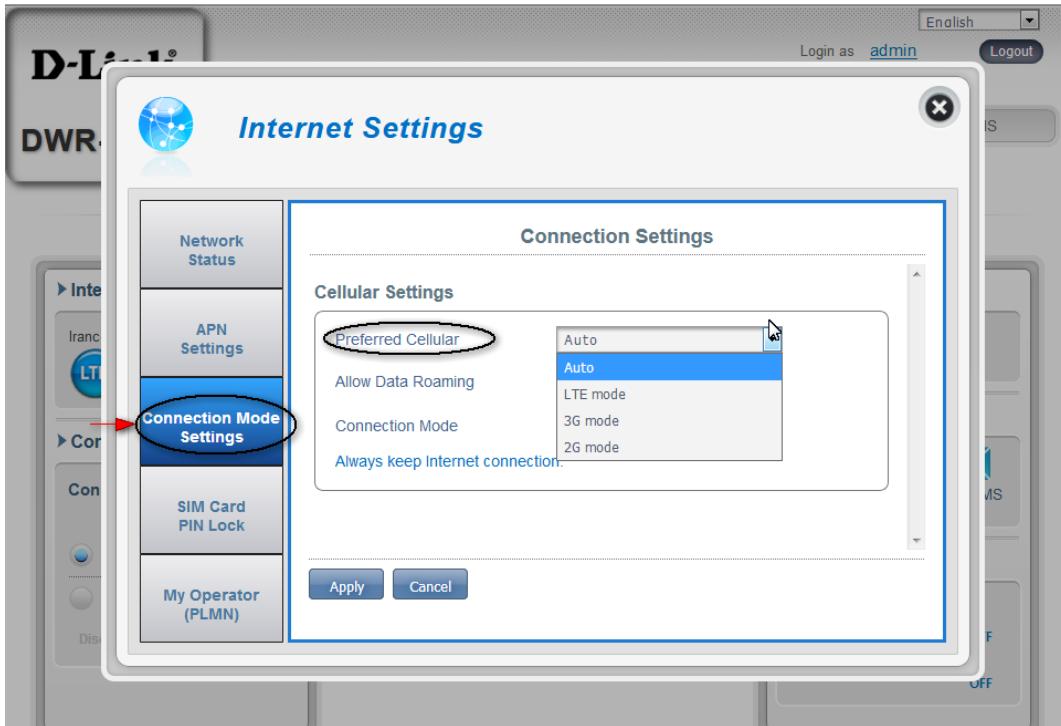

- برای تغییر آدرس آی پی دستگاه می توانید به منوی DHCP Settings از سربرگ Settings مراجعه کنید.

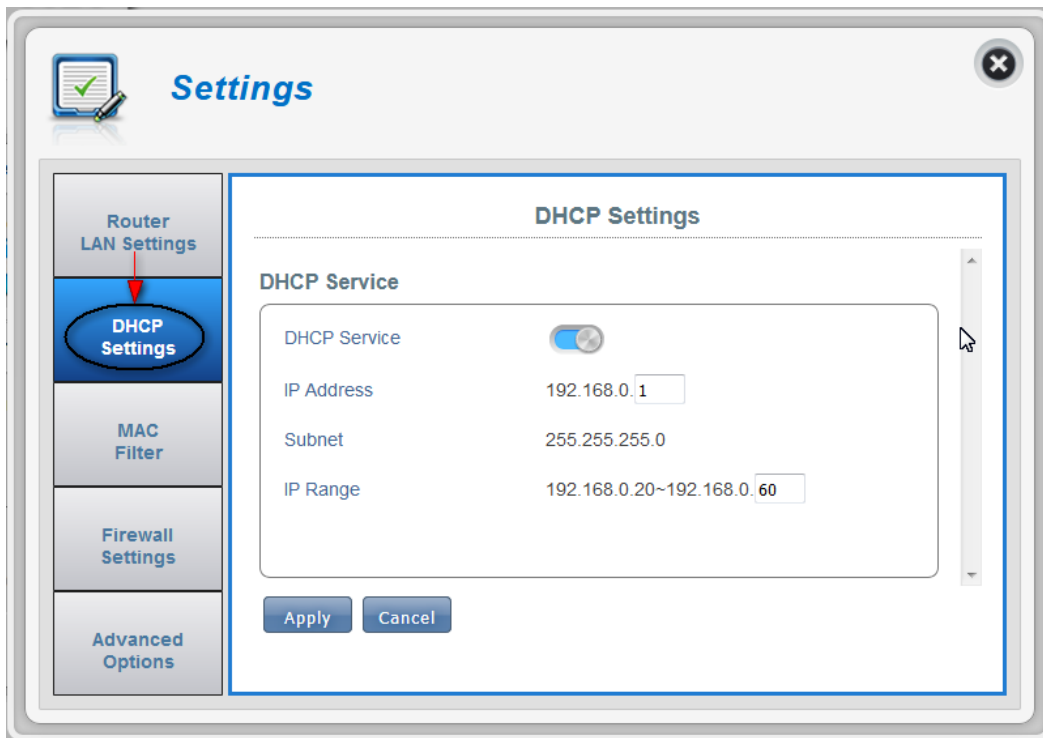

- برای تعریف MAC Address می‌توانید به منوی MAC Filter از سربرگ Settings بروید و تنظیمات مربوطه را انجام دهید.

The screenshot shows the 'Settings' application window. On the left is a sidebar with navigation options: Router LAN Settings, DHCP Settings, MAC Filter (highlighted with a red arrow and a circle), Firewall Settings, and Advanced Options. The main content area is titled 'MAC Filter Settings' and contains a section for 'MAC Filter For Wi-Fi 2.4 GHz'. A toggle switch for 'MAC Filter' is turned on. Below this is a 'MAC Filter Black List' section with a search input field, a 'Records: Displayed: -' label, and a dropdown menu set to '10'. A table with columns 'ID', 'Delete', and 'MAC Address' is visible but empty. At the bottom, there are 'Apply' and 'Cancel' buttons, and a status indicator 'Current Black List ( 0 / 10 )'.

